

MA 18SA

Active subwoofer, D-class 3000W DSP, (18"Nd LF), 134dB SPL



Aerodynamic bass-reflex active subwoofer, 3000W D-class amplifier, 134dB SPL

MAIN FEATURES

- Low frequency: 18" woofer/4.5"v.c.
- Frequency response: 30-150 Hz (± 3 dB)
- High pressure on low frequencies in large indoor/outdoor venues
- Birch plywood enclosure
- DSP with 4 presets (120/90Hz - normal/reverse phase) for selection of optimal frequency response

TECHNICAL SPECIFICATION

LOUDSPEAKER

- System type: active subwoofer

COMPONENTS

- Low frequency: 18" woofer/4.5"v.c.

FEATURES

- Built-in amp: 3000 W
- SPL max: 134 dB @1m (free field)

ACOUSTICAL SPECIFICATIONS

- SPL cont/peak: 128/134 dB @1m (free field)
- Frequency response: 30-150 Hz (± 3 dB)
- Coverage angle HxV: ° omnidirectional

ELECTRONICS SPECIFICATIONS

- Amplifier: digital
- Input sensitivity: 4 dBu (1,228Vrms) adjustable
- Protection: RMS limiter, fast limiter, temp.
- User controls: 120/90Hz - normal/reverse phase
- Processor: DSP
- Operating voltage/frequency: 220 V $\pm 10\%$, 50 Hz

INPUT/OUTPUT CONNECTORS

- Input signal: XLR IN/OUT
- Power connection: powerCON IN/OUT


CABINET CONSTRUCTION

- Cabinet material: 18 mm birchplywood
- Handles: 4 on side
- Hardware: 35 mm mounting pole

PHYSICAL

- Dimensions (WxHxD): 615x685x636 mm
- Weight: 53 kg

TECHICAL DRAWINGS

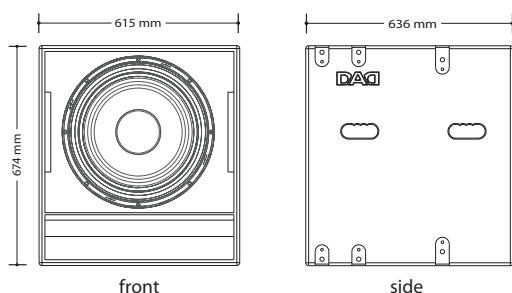

Visit our website
for specifications and
tech documentations

