

MA 605P

Line array module, 5°, 2-way (2x10"LF+1.4"Nd HF) 500/1000W AES, 138dB SPL

DAD[®]
DYNAMIC AUDIO DEVICE



High-directivity passive module for line-array, 2-way 500 W AES, 138dB SPL

MAIN FEATURES

- Low frequency: 2x10" neodymium woofer/2.6"v.c.
- High frequency: 1.4" neodymium driver/3"v.c.
- Frequency response: 65-18000 Hz (±3dB)
- Coverage angle HxV: 80x10°
- Hi-definition system for reproduction of voice and music in live and recorded performance
- For sound installations in environments requiring dynamics and high sound pressure
- Birch plywood enclosure

TECHNICAL SPECIFICATION

LOUDSPEAKER

- System type: passive 2 way

COMPONENTS

- Low frequency: 10" neodymium woofer / 2.6" v.c.
- High frequency: 1.4" neodymium driver / 3" v.c.

FEATURES

- AES/program power: 500/1000 W
- SPL max: 138 dB @1m (free field)

ACOUSTICAL SPECIFICATIONS

- Sensitivity: 101 dB @1W/1m (free field)
- Impedance: 8 Ohm
- SPL cont/peak: 132/138 dB @1m (free field)
- Frequency response: 70-18000 Hz (±3dB)
- Coverage angle HxV: 80x10 °
- Cross over frequency: 1100 Hz
- Protection: H.F. signal compression

INPUT/OUTPUT CONNECTORS

- Input signal: Neutrik NL4 IN/OUT

CABINET CONSTRUCTION

- Cabinet material: 18 mm birchplywood
- Suspension system: fixed angle bracket, M8 eyebolt, 35 mm pole mount
- Angle: 5 ° trapezoidal taper
- Handles: 2 on side

PHYSICAL


- Dimensions (WxHxD): 656x332x497 mm
- Weight: 28 kg

ACCESSORIES & RELATED PRODUCTS

- MA6BAR Compact flying-bar for MA605/MA615 line array system
- MA4SK Plywood skate for 2 pcs MA615/MA605, breaking swivel wheels

- MA6FC Flight case for MA6 line array modules, 4 wheels (2 breaking)

TECHICAL DRAWINGS

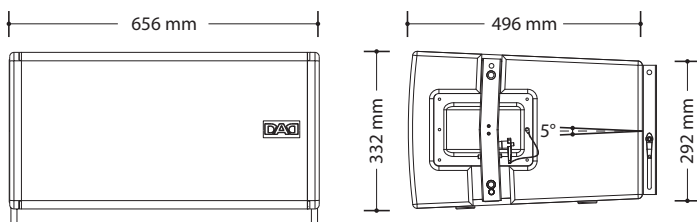

Visit our website
for specifications and
tech documentations



MUSIC & LIGHTS S.r.l.

Via A. Olivetti, snc
04026 - Minturno (LT) ITALY

info@musiclights.it
Tel: +39 0771 72190

dad-audio.it
VAT No. IT 02057590594