

MA 615P

Line array module, 15°, 2-way (2x10" LF+1.4" Nd HF) 500/1000W AES, 138dB SPL



Wide-dispersion passive module for line-array, 2-way 500 W AES, 137dB SPL

MAIN FEATURES

- Low frequency: 2x10" neodymium woofer/2.6"v.c.
- High frequency: 1.4" neodymium driver/3"v.c.
- Frequency response: 65-18000 Hz (± 3 dB)
- Coverage angle HxV: 100x30°
- Hi-definition system for reproduction of voice and music in live and recorded performance
- For sound installations in environments requiring dynamics and high sound pressure
- Birch plywood enclosure

TECHNICAL SPECIFICATION

LOUDSPEAKER

- System type: passive 2 way

COMPONENTS

- Low frequency: 10" neodymium woofer / 2.6" v.c.
- High frequency: 1.4" neodymium driver / 3" v.c.

FEATURES

- AES/program power: 500/1000 W
- SPL max: 137 dB @1m (free field)

ACOUSTICAL SPECIFICATIONS

- Sensitivity: 100 dB @1W/1m (free field)
- Impedance: 8 Ohm
- SPL cont/peak: 131/137 dB @1m (free field)
- Frequency response: 70-18000 Hz (± 3 dB)
- Coverage angle HxV: 100x30°
- Cross over frequency: 1100 Hz
- Protection: H.F. signal compression

INPUT/OUTPUT CONNECTORS

- Input signal: Neutrik NL4 IN/OUT

CABINET CONSTRUCTION

- Cabinet material: 18 mm birchplywood
- Suspension system: fixed angle bracket, M8 eyebolt, 35 mm pole mount
- Angle: 15° trapezoidal taper
- Handles: 2 on side

PHYSICAL


- Dimensions (WxHxD): 656x364x497 mm
- Weight: 28 kg

ACCESSORIES & RELATED PRODUCTS

- MA6BAR Compact flying-bar for MA605/MA615 line array system
- MA4SK Plywood skate for 2 pcs MA615/MA605, breaking swivel wheels

- MA6FC Flight case for MA6 line array modules, 4 wheels (2 breaking)

TECHICAL DRAWINGS

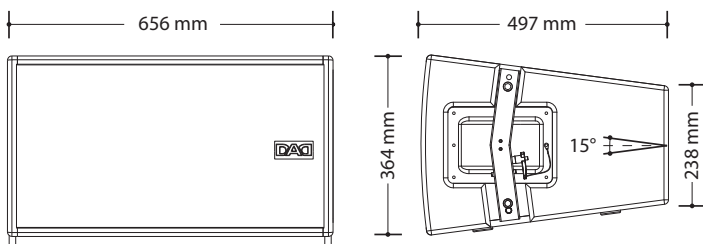

Visit our website for specifications and tech documentations

