




TECHNICAL SPECIFICATIONS

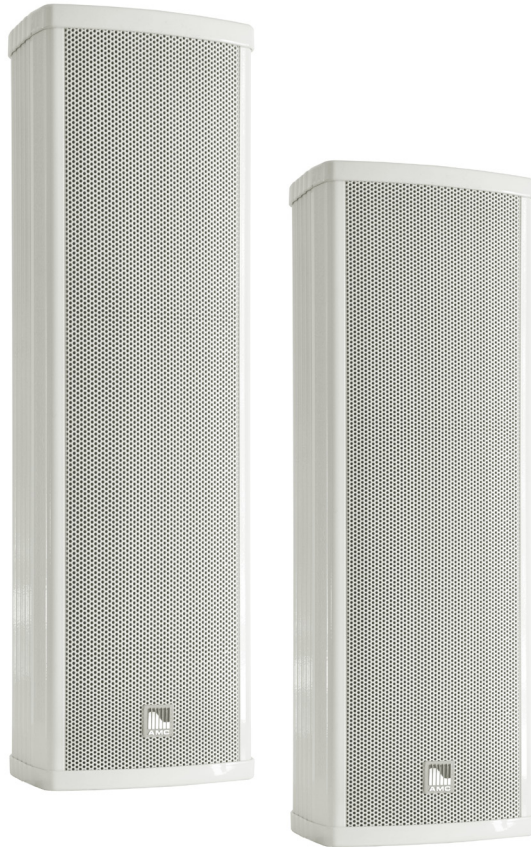

COM

COM - weatherproof column loudspeakers for voice and background music reproduction.

COM420 is a two way column loudspeaker with built-in 2x4" woofer and 1.5" tweeter. **COM440** has a built-in 4x4" woofer and 1.5" tweeter. Wide frequency range, 100V transformer with power taps, mounting brackets included, aluminum body, IP66, for indoor and outdoor use. Typical applications: warehouses, factory buildings, workshops, transport terminals and car parking lots.

	COM 420	COM440
Rated power	20 W	40 W
Transformer power taps	20 W - 10 W	40 W - 20 W
Sensitivity	90 dB (1 W/1 m)	91 dB (1 W/1 m)
Maximum SPL	103 dB (Pmax/1 m)	107 dB (Pmax/1 m)
Frequency response	120 Hz – 20 kHz	120 Hz – 20 kHz
Protection	IP 66	IP 66
Dimensions	425 mm × 150 mm x 125 mm	655 mm × 150 mm x 125 mm
Driver dimensions	2 x 4" (101,2 mm) woofer, 1,5" (38 mm) tweeter	4 x 4" (76,2 mm) woofer, 1,5" (38 mm) tweeter
Weight	3,9 kg	5,9 kg
Material	Aluminum	Aluminum
Colour	White (RAL 9016)	White (RAL 9016)